

# Technical data sheet

## Flush-mounted electronics box 46, rectangular, with clamping area to the side

Item no. 2003725



Flush-mounted electronic box, with side clamping space, rectangular shape, for use in masonry with an installation depth of at least 50 mm.

- Connector with bayonet lock, couplable on both sides
- 10 combination pipe entries of Ø 20 and 25 mm
- 2 entries up to Ø 20 mm in the base
- 4 entries for flat cables/ribbon cables
- 4 x 3 screw domes

Tested according to DIN EN 60670-1, DIN EN 60670-22 and DIN 49073-1.




PP Polypropylene

### Master data

Item no.	2003725
Type	UE 46
Description 1	UP Flush-mount. electronic box
Description 2	with lateral terminal area
Available from	01.10.2021
Dimension	Ø60xH50x114
Colour	Jet black
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	10 Piece
Weight	4,30 kg/100 pc.

### Technical data

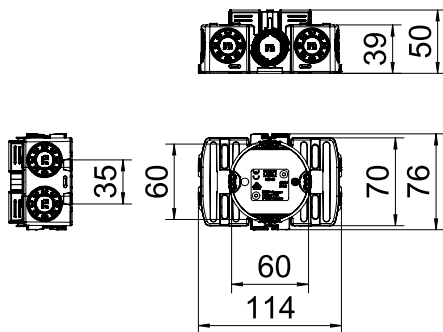

Width	76,00 mm
Height	50,00 mm
Length	114,00 mm
Diameter	61,00 mm
No. of entries	16
Type of entry	NYM cables, data cables and corrugated pipes
Type of housing penetration	Break-out opening
Version for	Single
Shape	Electrics socket
Device fixing	Screws ,
Cover	Without
Cover fastening	Screws ,
Entry from rear	<input checked="" type="checkbox"/>
Flame-resistant	acc. to VDE 0471/IEC 60695-2-11, test temperature 650°C
Shape	Rectangular
For pipe diameter	20/25 mm
Pipe entries Ø 20 mm	2
Combination entries Ø 20 / 25 mm	10
Accessory screw clearance	60,00 mm
Halogen-free	<input checked="" type="checkbox"/>

# Technical data sheet

Flush-mounted electronics box 46, rectangular, with clamping area to the side





Item no. 2003725



## Technical data

With nail strap	<input type="checkbox"/>
With bolts	<input checked="" type="checkbox"/>
Nominal cross section	1,50 - 2,50 mm <sup>2</sup>
Rated voltage	400,00 V
Impact-resistant	<input checked="" type="checkbox"/>
Protection rating	IP30
Airtight	<input type="checkbox"/>

Table 1

				
	1,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>	1,5 mm <sup>2</sup>	2,5 mm <sup>2</sup>
	7	5	8	6
	21	15	24	18