

Technical data sheet

UP Flush-mounted outlet box

Item no. 2003732



Flush-mounted outlet box for single cable routing. Oval shape, for use in masonry with an installation depth of at least 35 mm.

- 2 entries up to \varnothing 20 mm
- 1 combination entry of \varnothing 10 and 20 mm
- 1 entry up to \varnothing 20 mm in the base





PP Polypropylene

Master data

Item no.	2003732
Type	UG 30-WA-D
Description 1	UP Flush-mounted outlet box
Description 2	with cover
Available from	01.10.2021
Dimension	\varnothing 2x35mm, H35
Colour	Jet black
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	25 Piece
Weight	1,15 kg/100 pc.

Technical data

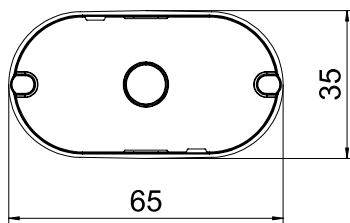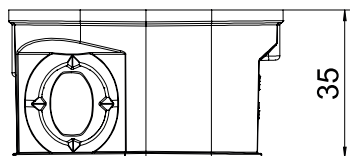

Width	35,00 mm
Height	35,00 mm
Length	65,00 mm
No. of entries	4
Entries	4
Type of entry	NYM cables, data cables and corrugated pipes
Type of housing penetration	Break-out opening
Version for	Other
Shape	Wall outlet socket
Cover	White
Cover fastening	Locking
Entry from rear	<input checked="" type="checkbox"/>
Flame-resistant	acc. to VDE 0471/IEC 60695-2-11, test temperature 650°C
Shape	Other
For pipe diameter	20 mm
Pipe entries \varnothing 20 mm	4
Halogen-free	<input checked="" type="checkbox"/>
Max. conductor cross-section	2,50 mm ²
With nail strap	<input type="checkbox"/>
With bolts	<input type="checkbox"/>
Nominal cross section	1,50 - 2,50 mm ²

Technical data sheet

UP Flush-mounted outlet box

Item no. 2003732



Technical data

Rated voltage	400,00 V
Impact-resistant	<input checked="" type="checkbox"/>
Protection rating	IP30
Airtight	<input type="checkbox"/>