


# Technical data sheet

3-wire connection cable, halogen-free, cross-section 2.5 mm², 5 m length, black  
Item number: 6108738



Connection cable 3 x 2.5 mm² in the version socket-connector, type WINSTA® MIDI.

Hose pipe: H05Z1Z1-F 3 x 2.5 mm²  
Suitable for connection of ready-for-connection universal supports Connect UTC to an energy distributor.

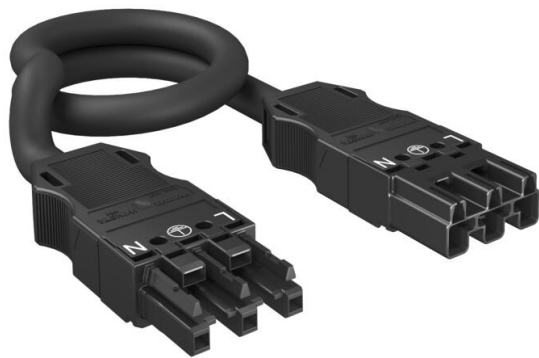

PA Polyamide

| Master data                        |                          |  |
|------------------------------------|--------------------------|--|
| Item number                        | 6108738                  |  |
| Type                               | VL-WIN 3P2.5H5SW         |  |
| Description 1                      | Connection cable         |  |
| Description 2                      | 3x2,5mm², WINSTA         |  |
| Manufacturer                       | OBO                      |  |
| Dimension                          | 5000x27x15               |  |
| Colour                             | Black                    |  |
| Material                           | Polyamide                |  |
| Smallest sales unit                | 1                        |  |
| Unit of quantity                   | Piece                    |  |
| Weight                             | 78 kg                    |  |
| Weight unit                        | kg/100 pc.               |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,1046 kg CO2e / 1 Piece |  |

| Dimensions |  |
|------------|--|
|            |  |

# Technical data sheet

3-wire connection cable, halogen-free, cross-section 2.5 mm<sup>2</sup>, 5 m length, black  
Item number: 6108738



## Technical data

|                                     |                     |
|-------------------------------------|---------------------|
| Number of poles                     | 3                   |
| Type of terminated cable            | Connection cable    |
| Type of locking                     | Separate            |
| Version, page 1                     | socket              |
| Version, page 2                     | Connector           |
| Rated surge voltage                 | 4                   |
| Fire load                           | 3.31                |
| Colour of the coding/contact insert | Black               |
| Halogen-free                        | yes                 |
| Cable type                          | H05Z1Z1-F           |
| Cable length                        | 5000 mm             |
| Jacket colour                       | Black               |
| Nominal voltage                     | 250 V               |
| Nominal current                     | 20 A                |
| Pin labelling                       | L, N, PE            |
| Cross-section                       | 1.5 mm <sup>2</sup> |
| Protection rating                   | IP20                |
| Degree of soiling                   | 3                   |