

# Technical data sheet

## Trunking, type WDK 15030

Item number: 6025013



Trunking cover and base with base perforation.



**PVC** Polyvinylchloride

### Master data

|                                    |                         |
|------------------------------------|-------------------------|
| Item number                        | 6025013                 |
| Type                               | WDK15030CW              |
| Description 1                      | Wall trunking system    |
| Description 2                      | with base perforation   |
| Manufacturer                       | OBO                     |
| Dimension                          | 15x30x2000              |
| Colour                             | Cream; RAL 9001         |
| Material                           | Polyvinylchloride       |
| Smallest sales unit                | 32                      |
| Unit of quantity                   | Metre                   |
| Weight                             | 19.5 kg                 |
| Weight unit                        | kg/100 m                |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,353 kg CO2e / 1 Meter |


# Technical data sheet

## Trunking, type WDK 15030

Item number: 6025013



### Dimensions

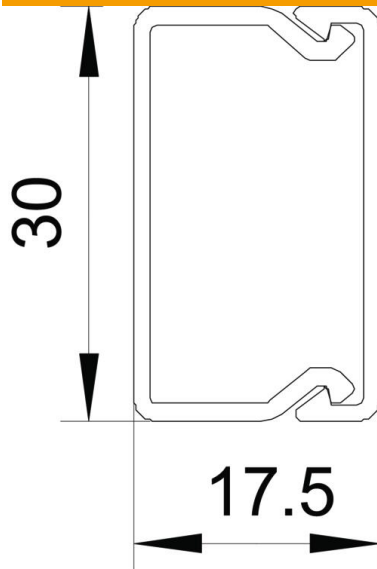

|        |          |
|--------|----------|
| Length | 2,000 mm |
| Width  | 30 mm    |
| Height | 17.5 mm  |

### Technical data

|                                                             |                  |
|-------------------------------------------------------------|------------------|
| Number of fixed partitions                                  | 0                |
| Number of cables NYM 3 x 1.5 mm² Ø 10.5 mm (without socket) | 2                |
| Number of cables NYM 3 x 2.5 mm² Ø 11.5 mm (without socket) | 2                |
| Number of cables NYM 5 x 1.5 mm² Ø 12.0 mm (without socket) | 2                |
| Number of insertable partitions                             | 0                |
| Version, cable trunking cover                               | Loose            |
| Fastening type                                              | Base perforation |
| Maintain electrical functions                               | no               |
| Halogen-free                                                | no               |
| Cable retaining clip                                        | no               |
| Duct connector                                              | no               |
| Delivery on a roll                                          | no               |
| Usable cross-section                                        | 375 mm²          |
| Protection rating                                           | IP30             |
| Protective film                                             | no               |
| Protection rating IK code                                   | IK04             |
| Permitted temperature range, max.                           | 60 °C            |
| Permitted temperature range, min.                           | -5 °C            |