

# Technical data sheet

## Trunking, type WDK 60170

Item number: 6027164



Trunking cover and base with base perforation.  
Four cover clips included.  
Lid clamp can be moved along the entire length of the trunking.



**PVC** Polyvinylchloride

### Master data

|                                    |                          |
|------------------------------------|--------------------------|
| Item number                        | 6027164                  |
| Type                               | WDK60170LGR              |
| Description 1                      | Wall trunking system     |
| Description 2                      | with base perforation    |
| Manufacturer                       | OBO                      |
| Dimension                          | 60x170x2000              |
| Colour                             | Light grey; RAL 7035     |
| Material                           | Polyvinylchloride        |
| Smallest sales unit                | 8                        |
| Unit of quantity                   | Metre                    |
| Weight                             | 178 kg                   |
| Weight unit                        | kg/100 m                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,7947 kg CO2e / 1 Meter |


# Technical data sheet

Trunking, type WDK 60170

Item number: 6027164



## Dimensions

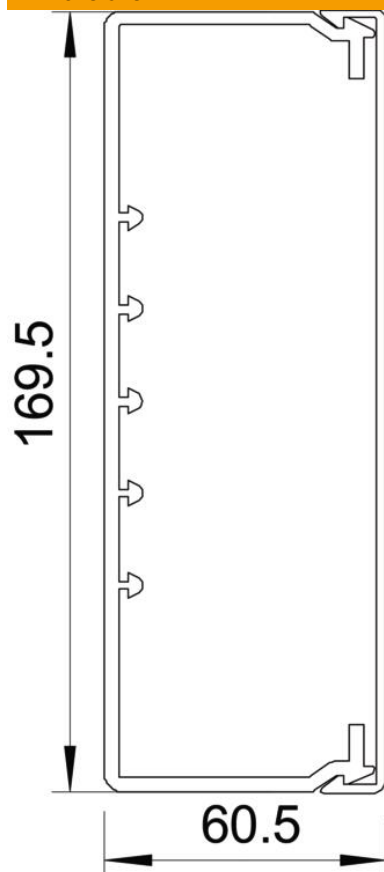

|        |          |
|--------|----------|
| Length | 2,000 mm |
| Width  | 170 mm   |
| Height | 60 mm    |

# Technical data sheet

Trunking, type WDK 60170

Item number: 6027164



## Technical data

|                                                                         |                      |
|-------------------------------------------------------------------------|----------------------|
| Number of fixed partitions                                              | 0                    |
| Number of cables NYM 3 x 1.5 mm <sup>2</sup> Ø 10.5 mm (without socket) | 46                   |
| Number of cables NYM 3 x 2.5 mm <sup>2</sup> Ø 11.5 mm (without socket) | 39                   |
| Number of cables NYM 5 x 1.5 mm <sup>2</sup> Ø 12.0 mm (without socket) | 35                   |
| Number of insertable partitions                                         | 2                    |
| Version, cable trunking cover                                           | Loose                |
| Fastening type                                                          | Base perforation     |
| Halogen-free                                                            | no                   |
| Cable retaining clip                                                    | yes                  |
| Duct connector                                                          | no                   |
| Delivery on a roll                                                      | no                   |
| Usable cross-section                                                    | 8089 mm <sup>2</sup> |
| Protection rating                                                       | IP30                 |
| Protective film                                                         | no                   |
| Protection rating IK code                                               | IK04                 |
| Permitted temperature range, max.                                       | 60 °C                |
| Permitted temperature range, min.                                       | -5 °C                |