

# Technical data sheet

T piece cover, for trunking type WDK 15040

Item number: 6192467



T piece cover for changing the direction of the WDK trunking.



**PVC** Polyvinylchloride

| Master data                        |                          |  |
|------------------------------------|--------------------------|--|
| Item number                        | 6192467                  |  |
| Type                               | WDK HT15040RW            |  |
| Description 1                      | T piece hood             |  |
| Manufacturer                       | OBO                      |  |
| Dimension                          | 15x40mm                  |  |
| Colour                             | Pure white; RAL 9010     |  |
| Material                           | Polyvinylchloride        |  |
| Smallest sales unit                | 4                        |  |
| Unit of quantity                   | Piece                    |  |
| Weight                             | 1.746 kg                 |  |
| Weight unit                        | kg/100 pc.               |  |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0686 kg CO2e / 1 Piece |  |


# Technical data sheet

T piece cover, for trunking type WDK 15040

Item number: 6192467



## Dimensions

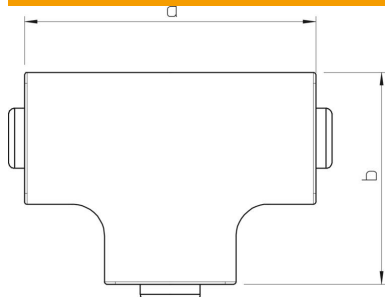

|             |       |
|-------------|-------|
| Length      | 83 mm |
| Width       | 40 mm |
| Height      | 15 mm |
| Dimension a | 83 mm |
| Dimension b | 74 mm |
| Dimension H | 40 mm |

## Technical data

|                                   |              |
|-----------------------------------|--------------|
| Version for                       | Hood fitting |
| Fastening type                    | Lockable     |
| Maintain electrical functions     | no           |
| for duct dimension                | 15 x 40      |
| Halogen-free                      | no           |
| Trunking depth                    | 15 mm        |
| Protection rating                 | IP30         |
| Protective film                   | no           |
| Protection rating IK code         | IK04         |
| Permitted temperature range, max. | 60 °C        |
| Permitted temperature range, min. | -5 °C        |