

# Technical data sheet

## 90° bend 110 A2

Item number: 6312539



90° bend, horizontal, for all wide span cable ladders of 110 mm side height.  
For further stabilisation, additional supports should be planned for the area of the fittings.




|    |                 |
|----|-----------------|
| A2 | Stainless steel |
| 2B | Bright, treated |

### Master data

|                                    |                                |
|------------------------------------|--------------------------------|
| Item number                        | 6312539                        |
| Type                               | WLB 90 112 A2                  |
| Description 1                      | 90° bend                       |
| Description 2                      | for wide span cable ladder 110 |
| Manufacturer                       | OBO                            |
| Dimension                          | 110x200                        |
| Colour                             | stainless steel                |
| Material                           | Stainless steel 1.4301         |
| Surface                            | Bright, treated                |
| Surface standard                   |                                |
| Smallest sales unit                | 1                              |
| Unit of quantity                   | Piece                          |
| Weight                             | 881.8 kg                       |
| Weight unit                        | kg/100 pc.                     |
| CO2 Footprint (GWP) Cradle-to-Gate | 48,2538 kg CO2e / 1 Piece      |

### Dimensions

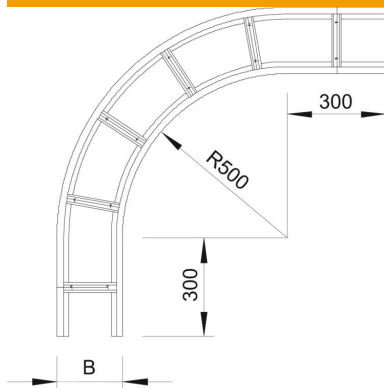

|             |        |
|-------------|--------|
| Width       | 200 mm |
| Height      | 110 mm |
| Dimension B | 200 mm |
| Dimension R | 200 mm |

# Technical data sheet

90° bend 110 A2

Item number: 6312539



## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Bend (angle)                  | 90°                  |
| Version of the rungs          | Profile unperforated |
| Maintain electrical functions | no                   |
| Change of direction           | Horizontal           |
| Rustproof steel, pickled      | no                   |
| Side perforation              | no                   |
| Wide-span version             | yes                  |
| Rail thickness                | 2 mm                 |