

Technical data sheet

Porous concrete anchor with internal thread

Item no. 3497704



Steel spreading anchor tested for fire protection properties and approved for use in porous concrete.

Version with internal thread. Suitable for fire loads of up to 120 minutes, please refer to the general construction approval for the load values (applies to porous concrete of resistance classes of min. 3.3).

A setting tool is required for mounting.

DIBt U


St Steel

G Electrogalvanised

Master data

Item no.	3497704
Type	PBD i M10
Description 1	Aerated concrete anchor
Description 2	with internal thread
Dimension	92x16
Material	Steel
Material symbol	St
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	25 Piece
Weight	9,30 kg/100 pc.

Technical data

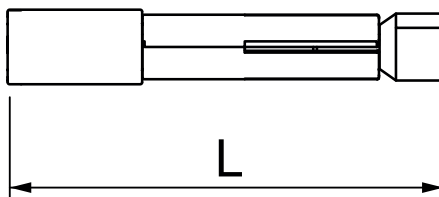

Length	92,00 mm
Dimension L	92,00 mm
Version	For knocking in
Thread	M10
Thread type	Metric
Thread length	35,00 mm
Thread metric	10