

Technical data sheet

Vertical ladder, SLM50

Item no. 6010008



Heavyweight vertical ladder system for the maintenance of electrical function to DIN 4102 Part 12. Approved clips, type 2056 U/M. Supplied unmounted.


St	Steel
FT	Hot-dip galvanised

Product text, scope of delivery	Rungs, type C 40/..., and bolts, type FRS 8 x 35, are supplied unmounted with rail profiles. Rung distance: 300 mm
---------------------------------	---

Master data

Item no.	6010008
Type	SLM50C40F 40 FT
Description 1	Vertical ladder
Description 2	rung distance 300 mm
Manufacturer	OBO
Dimension	400x3000mm
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	3 m
Weight	740,00 kg/100 m

Technical data

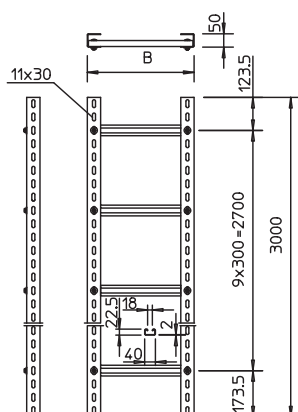

Length	3.000,00 mm
Width	400,00 mm
Side height	50,00 mm
Dimension B	400,00 mm
Side wall version	Profile (open)
Rung version	Profile unperforated
Suitable for maintaining electrical function	☒
Rustproof steel, pickled	☐
Side perforation	☒
Rung distance	300,00 mm