

# Technical data sheet

0° socket, Denmark, single, IT-encoded

Item no. 6117203



Socket, single 0°, to Danish standard, encoded for IT power circuit, with screw terminals, 2-pin, 16 A 250 V~, with connection terminals to IEC 60884-1.


For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.

**PC** Polycarbonate

## Master data

Item no.	6117203
Type	SKS-DKE0 RW1
Description 1	Socket, Danish version
Description 2	for IT power circuit
Dimension	250V, 10/16A
Colour	Pure white
RAL number	9010
Material	Polycarbonate
Material symbol	PC
Smallest sales unit (VG)	12 Piece
Weight	3,05 kg/100 pc.

## Technical data

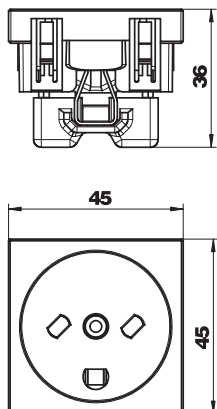

Width	45,00 mm
Height	45,00 mm
Depth	36,00 mm
Cover	Central plate
Closable	<input type="checkbox"/>
Printed label/coding	Without printing
Version	Single 0°
Version	Socket, Danish version, for IT power circuit
Surface version	Not applicable
Sockets/switch version	Other
Version for	Other
Number of poles	2
Number of units	1
Ejection mechanism	<input type="checkbox"/>
Fastening type	Lock
Labelling panel	<input type="checkbox"/>
Operating temperature	-5,00 - 40,00 °C
Error current protection	<input type="checkbox"/>
For more difficult conditions (according to VDE)	<input type="checkbox"/>
Halogen-free	<input type="checkbox"/>
Increased touch protection	<input type="checkbox"/>

# Technical data sheet

0° socket, Denmark, single, IT-encoded

Item no. 6117203



## Technical data

Hinged cover	<input type="checkbox"/>
Warning light	<input type="checkbox"/>
With on/off switch	<input type="checkbox"/>
With fine-wire fuse	<input type="checkbox"/>
With functional lighting	<input type="checkbox"/>
With orientation lighting	<input type="checkbox"/>
Mounting type	Device installation duct
Nominal voltage	250,00 V
Nominal current	16,00 A
Protection rating	Other
Special power supply	Without special power supply
Transparent	<input type="checkbox"/>
Surge protection	<input type="checkbox"/>
Rotated central insert	<input type="checkbox"/>