


# Technical data sheet

## Socket 0°, Connect 80, protective contact, triple

Item no. 6120452

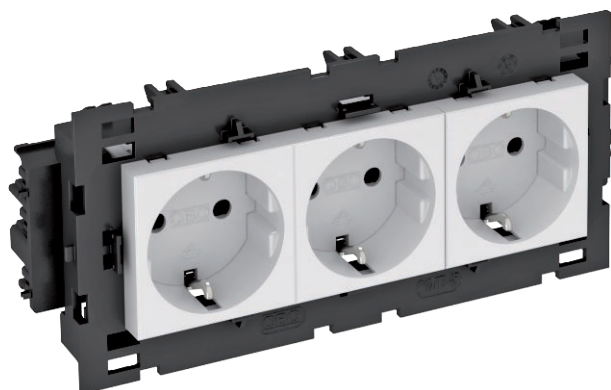

Protective contact socket with connection to side, Triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking systems.

For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.




**PC** Polycarbonate

### Master data

|                          |                                |
|--------------------------|--------------------------------|
| Item no.                 | 6120452                        |
| Type                     | STD-D0C8 RW3                   |
| Description 1            | Socket 0°, triple              |
| Description 2            | protective contact, Connect 80 |
| Dimension                | 250V, 10/16A                   |
| Colour                   | Pure white                     |
| RAL number               | 9010                           |
| Material                 | Polycarbonate                  |
| Material symbol          | PC                             |
| Smallest sales unit (VG) | 1 Piece                        |
| Weight                   | 20,00 kg/100 pc.               |

### Technical data

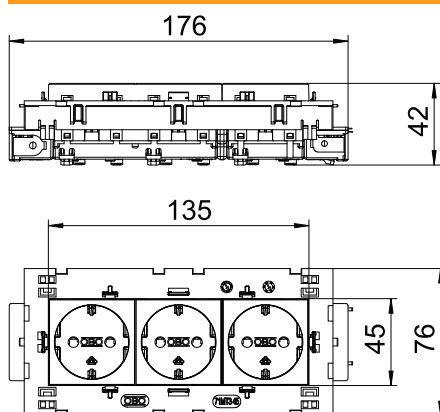

|                                                  |                                                   |
|--------------------------------------------------|---------------------------------------------------|
| Width                                            | 176,00 mm                                         |
| Height                                           | 76,00 mm                                          |
| Depth                                            | 42,00 mm                                          |
| Cover                                            | Central plate                                     |
| Closable                                         | <input type="checkbox"/>                          |
| Connection type                                  | Screwless terminal                                |
| Printed label/coding                             | Without printing                                  |
| Version                                          | Triple 0°                                         |
| Version                                          | Socket 0°, triple, protective contact, Connect 80 |
| Surface version                                  | Matt                                              |
| Sockets/switch version                           | SCHUKO                                            |
| Version for                                      | SCHUKO                                            |
| Number of poles                                  | 2                                                 |
| Number of units                                  | 3                                                 |
| Number of modules (for modular construction)     | 0                                                 |
| Number of switchable sockets                     | 0                                                 |
| Ejection mechanism                               | <input type="checkbox"/>                          |
| Fastening type                                   | Lock                                              |
| Labelling panel                                  | <input type="checkbox"/>                          |
| Operating temperature                            | -5,00 - 40,00 °C                                  |
| Error current protection                         | <input type="checkbox"/>                          |
| For more difficult conditions (according to VDE) | <input type="checkbox"/>                          |
| Power reserve                                    | <input type="checkbox"/>                          |
| Halogen-free                                     | <input checked="" type="checkbox"/>               |
| Insulated installation                           | <input type="checkbox"/>                          |
| Increased touch protection                       | <input checked="" type="checkbox"/>               |

# Technical data sheet

Socket 0°, Connect 80, protective contact, triple

Item no. 6120452



## Technical data

|                           |                              |
|---------------------------|------------------------------|
| Hinged cover              | <input type="checkbox"/>     |
| Coding                    | No                           |
| Warning light             | <input type="checkbox"/>     |
| With on/off switch        | <input type="checkbox"/>     |
| With fine-wire fuse       | <input type="checkbox"/>     |
| With functional lighting  | <input type="checkbox"/>     |
| With orientation lighting | <input type="checkbox"/>     |
| Mounting type             | Device installation duct     |
| Nominal voltage           | 250,00 V                     |
| Nominal current           | 16,00 A                      |
| Protection rating         | Other                        |
| Special power supply      | Without special power supply |
| Socket version            | Schutzkontakt                |
| Socket angle              | 0°                           |
| Transparent               | <input type="checkbox"/>     |
| Surge protection          | <input type="checkbox"/>     |
| Rotated central insert    | <input type="checkbox"/>     |