


Technical data sheet

Socket 33°, Connect 45, protective contact, double

Item no. 6120488

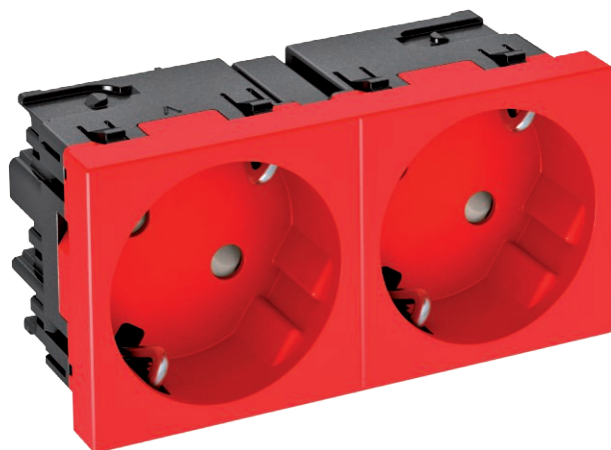

Power socket with side connection Double 33°, with increased touch protection with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1.

For installation in Rapid 45 ducts, device installation ducts, installation columns, underfloor systems and Deskboxes.




PC Polycarbonate

Master data

Item no.	6120488
Type	STD-D3C SR02
Description 1	Socket 33°, double
Description 2	protective contact, Connect 45
Dimension	250V, 10/16A
Colour	Signal red
RAL number	3001
Material	Polycarbonate
Material symbol	PC
Smallest sales unit (VG)	1 Piece
Weight	8,50 kg/100 pc.

Technical data

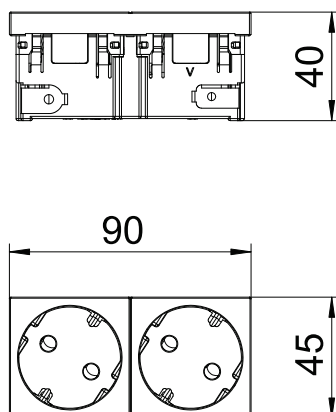

Width	90,00 mm
Height	45,00 mm
Depth	40,00 mm
Cover	Central plate
Closable	☐
Connection type	Screwless terminal
Printed label/coding	Without printing
Version	Double 33°
Version	Socket 33°, double, protective contact, Connect 45
Surface version	Matt
Sockets/switch version	SCHUKO
Version for	SCHUKO
Number of poles	2
Number of units	2
Number of modules (for modular construction)	2
Number of switchable sockets	0
Ejection mechanism	☐
Fastening type	Lock
Labelling panel	☐
Operating temperature	-5,00 - 40,00 °C
Error current protection	☐
For more difficult conditions (according to VDE)	☐
Halogen-free	☒
Insulated installation	☐

Technical data sheet

Socket 33°, Connect 45, protective contact, double

Item no. 6120488



Technical data

Increased touch protection	☒
Hinged cover	☐
Coding	No
Warning light	☐
With on/off switch	☐
With fine-wire fuse	☐
With functional lighting	☐
With orientation lighting	☐
Mounting type	Device installation duct
Nominal voltage	250,00 V
Nominal current	16,00 A
Protection rating	Other
Special power supply	Without special power supply
Socket version	Schutzkontakt
Socket angle	33°
Transparent	☐
Surge protection	☐
Rotated central insert	☒