

Technical data sheet

UVS energy distributor with plug connection, special circuit

Item no. 6107988



Input: 1x three-phase circuit using a self-locking plug connector, 5-pin, type WINSTA® MIDI (connector part).
Output: 6 self-locking plug connectors, 3-pin, in white, 25 A, type WINSTA® MIDI (socket part: 2x L1, 2x L2, 2x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.

Input: 1x three-phase circuit using a self-locking plug connector, 5-pin, type WINSTA® MIDI (connector part).
Output: 6 self-locking plug connectors, 3-pin, in white, 25 A, type WINSTA® MIDI (socket part: 2x L1, 2x L2, 2x L3).
Internal wiring: PVC non-sheathed cable H07V-U2.5.




St Steel

Master data

Item no.	6107988
Type	UVS-WIN 6W
Description 1	Underfloor distributor
Description 2	with WINSTA, 1I 60
Dimension	150x163x46
Material	Steel
Material symbol	St
Smallest sales unit (VG)	1 Piece
Weight	73,80 kg/100 pc.

Technical data

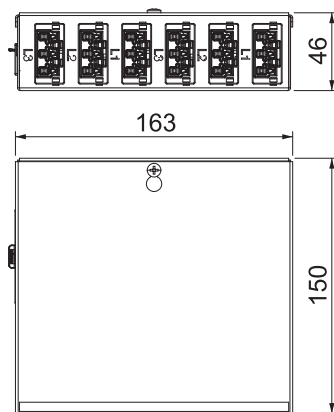

Length	196,00 mm
Width	149,00 mm
Height	46,00 mm
No. of outlets	6
Connection type	Plug-in system
Number of input circuits	1
Input	5-pole
Colour of the plug connector system	White
Cross-section of the connection cable	4,00 mm ²