


Technical data sheet

Cable tray SKSU 60

Item no. 6063950

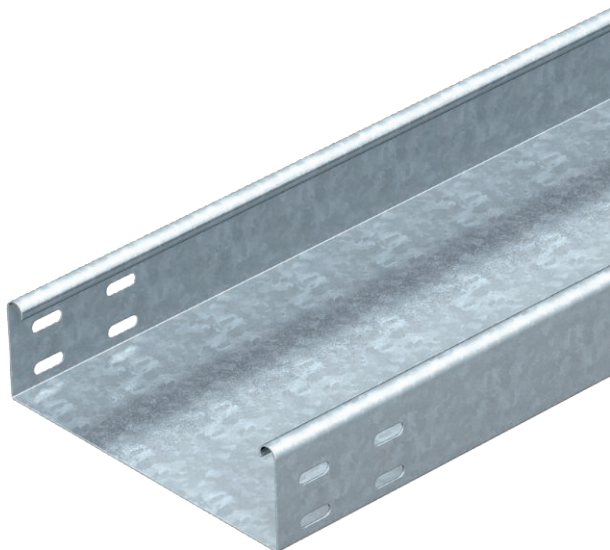

SKS 60 = heavy-duty cable tray system, unperforated, with 60 mm side height.

The cable tray has connector perforations on both sides.

Straight connectors should be ordered separately and in the appropriate quantity.

Magnetic shield insulation without cover 20 dB, with cover 50 dB.



St	Steel
FS	Strip galvanised

Master data

Item no.	6063950
Type	SKSU 640 FS
Description 1	Cable tray SKSU
Description 2	unperforated, connector holes
Manufacturer	OBO
Dimension	60x400x3000
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	3 m
Weight	639,00 kg/100 m

Technical data



Usable cross-section	23.800,00 mm ²
Usable cross-section	238,00 cm ²
Suitable for maintaining electrical function	☐
Connector version	Without connectors
Base perforation	0
With cover	☐
Mounting perforation in base	☐
NATO hole pattern	☐
Rustproof steel, pickled	☐
Side perforation	☐
Wide-span version	☐

Technical data sheet


Cable tray SKSU 60

Item no. 6063950



Technical data

Dimensions

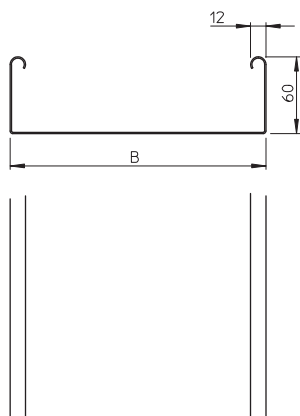


Length	3.000,00 mm
Width	400,00 mm
Height	60,00 mm
Side height	60,00 mm
Dimension B	400,00 mm
Plate thickness	1,50 mm

Appr. load:

Support spacing 1.5 m	2,60 kN/m
Support spacing 2.0 m	1,90 kN/m
Support spacing 2.5 m	1,10 kN/m
Support spacing 3.0 m	0,55 kN/m

Load diagram, cable tray, type SKSU 60

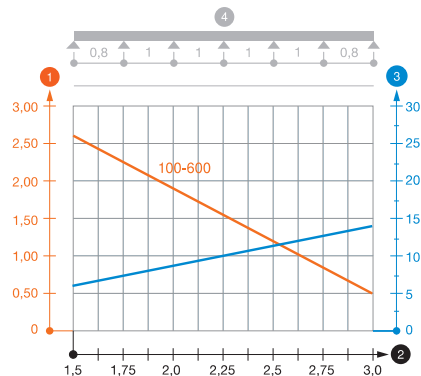

- 1 Permitted cable tray/ladder load in kN/m without man load
 - 2 Support width in m
 - 3 Rail bend in mm at permitted kN/m
 - 4 Load scheme during testing
- Load curve with cable tray/ladder width in mm
- Strut bend curve according to support width