

Technical data sheet

Heavy-duty vertical cable ladder SLM 50, 3 m C40

Item no. 6010547



The vertical ladder with a 50 mm side height is shipped in an unmounted state and must be screwed together on the construction site.

The appropriate clamp clip for the C profile rung is type 2056U.




St	Steel
FT	Hot-dip galvanised

Master data

Item no.	6010547
Type	SLM 50 C40 10 FT
Description 1	Vertical ladder heavyweight
Description 2	with C 40 rung
Manufacturer	OBO
Dimension	1000x3000
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	3 m
Weight	793,50 kg/100 m

Technical data

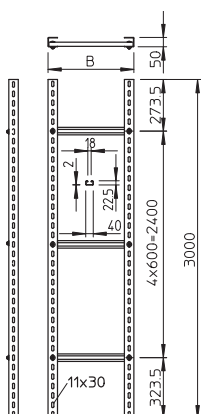

Length	3.000,00 mm
Width	1.000,00 mm
Side height	50,00 mm
Dimension B	1.000,00 mm
Side wall version	U profile
Rung version	Profile unperforated
Suitable for maintaining electrical function	☐
Rail thickness	2,50 mm
Rustproof steel, pickled	☐
Side perforation	☒
Rung distance	600,00 mm