


Technical data sheet

Cable ladder with Z rung, 35

Item no. 7098066

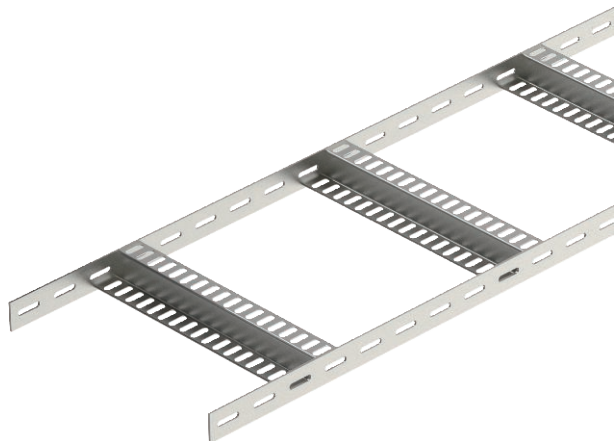

Light-duty shipbuilding cable ladder with perforated side rail of side height 35 mm with welded, perforated Z rungs. Load tested according to IEC in conjunction with connector, type SLV.

Bends on request.




VA	Stainless steel, rustproof 1.4301
2B	Bright, reworked

Master data

Item no.	7098066
Type	SLZ L 200 A2
Description 1	Cable ladder, shipbuilding
Description 2	with Z-rung
Dimension	35x206x3000
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	3 m
Weight	187,67 kg/100 m

Technical data

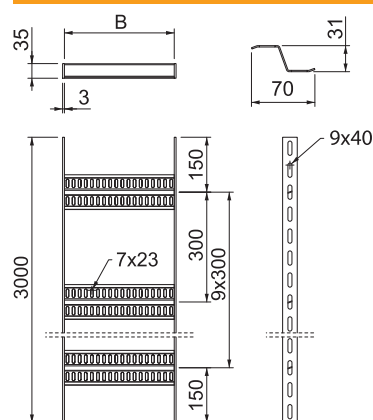

Length	3.000,00 mm
Width	200,00 mm
Side height	35,00 mm
Dimension B	206,00 mm
Dimension	35x200 mm
Rung version	Profile perforated
Side rail version	Flat profile
Fastening of rung	Welded
Suitable for maintaining electrical function	☐
Rail thickness	3,00 mm
Rustproof steel, pickled	☒
Side perforation	☒
Rung distance	300,00 mm
Wide-span version	☐
Impact energy	5,00 J

Appr. load:

Support spacing 1.0 m	2,80 kN/m
Support spacing 1.5 m	1,00 kN/m
Support spacing 2.0 m	0,55 kN/m
Support spacing 2.5 m	0,35 kN/m
Support spacing 3.0 m	0,25 kN/m

Technical data