


# Technical data sheet

## Cable ladder with Z rung, 35

Item no. 7098070

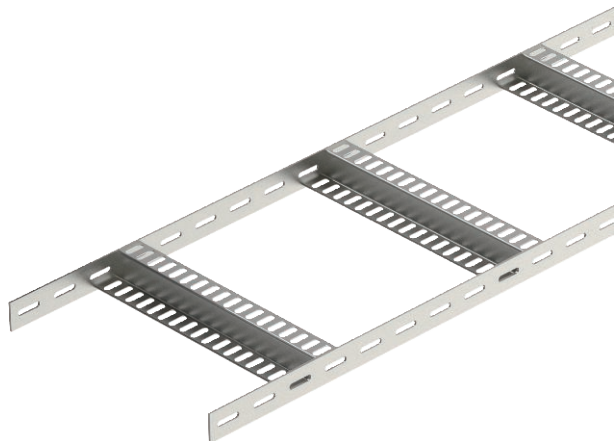

Light-duty shipbuilding cable ladder with perforated side rail of side height 35 mm with welded, perforated Z rungs. Load tested according to IEC in conjunction with connector, type SLV.

Bends on request.




|           |                                   |
|-----------|-----------------------------------|
| <b>VA</b> | Stainless steel, rustproof 1.4301 |
| <b>2B</b> | Bright, reworked                  |

### Master data

|                          |                                      |
|--------------------------|--------------------------------------|
| Item no.                 | 7098070                              |
| Type                     | SLZ L 400 A2                         |
| Description 1            | Cable ladder, shipbuilding           |
| Description 2            | with Z-rung                          |
| Dimension                | 35x406x3000                          |
| Material                 | Stainless steel, material no. 1.4301 |
| Material symbol          | A2                                   |
| Surface                  | Bright, reworked                     |
| Surface symbol           | 2B                                   |
| Smallest sales unit (VG) | 3 m                                  |
| Weight                   | 229,17 kg/100 m                      |

### Technical data

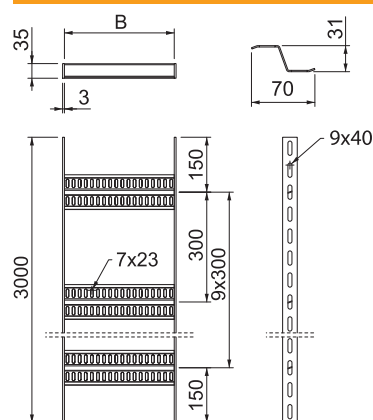

|                                              |                                     |
|----------------------------------------------|-------------------------------------|
| Length                                       | 3.000,00 mm                         |
| Width                                        | 400,00 mm                           |
| Side height                                  | 35,00 mm                            |
| Dimension B                                  | 406,00 mm                           |
| Dimension                                    | 35x400 mm                           |
| Rung version                                 | Profile perforated                  |
| Side rail version                            | Flat profile                        |
| Fastening of rung                            | Welded                              |
| Suitable for maintaining electrical function | <input type="checkbox"/>            |
| Rail thickness                               | 3,00 mm                             |
| Rustproof steel, pickled                     | <input checked="" type="checkbox"/> |
| Side perforation                             | <input checked="" type="checkbox"/> |
| Rung distance                                | 300,00 mm                           |
| Wide-span version                            | <input type="checkbox"/>            |
| Impact energy                                | 5,00 J                              |

### Appr. load:

|                       |           |
|-----------------------|-----------|
| Support spacing 1.0 m | 2,20 kN/m |
| Support spacing 1.5 m | 1,00 kN/m |
| Support spacing 2.0 m | 0,55 kN/m |
| Support spacing 2.5 m | 0,25 kN/m |
| Support spacing 3.0 m | 0,25 kN/m |

### Technical data