


Technical data sheet

Roof conductor holder for ridge tiles, 185–260 mm, Rd 8–10

Item no. 5202590

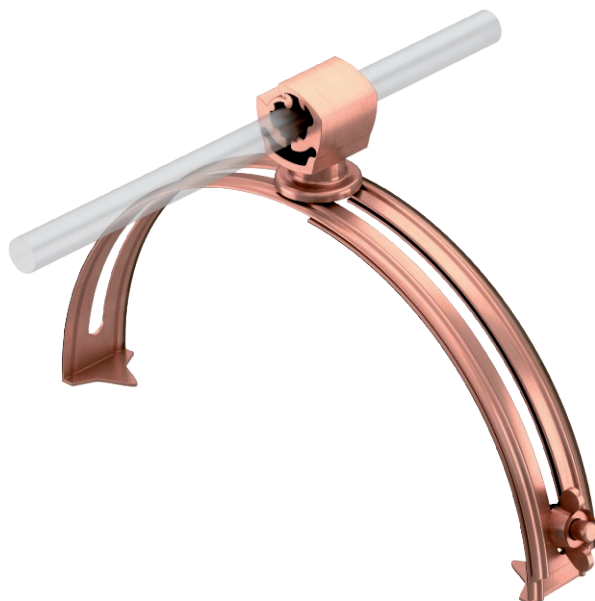

Cu Copper


132/...: Roof conductor holder for ridge tiles

- Adjustable width from 185-260 mm
- Bottom part made of non-rusting stainless steel (V2A) or of copper
- Infinitely adjustable conductor holder
- Conductor holder of polyamide
- For round conductor Rd 8-10
- Fast installation using wing screw

Master data

Item no.	5202590
Type	132 K-CU
Description 1	Roof conductor holder
Description 2	for ridge tiles
Material	Copper
Material symbol	Cu
Smallest sales unit (VG)	10 Piece
Weight	11,60 kg/100 pc.

Technical data

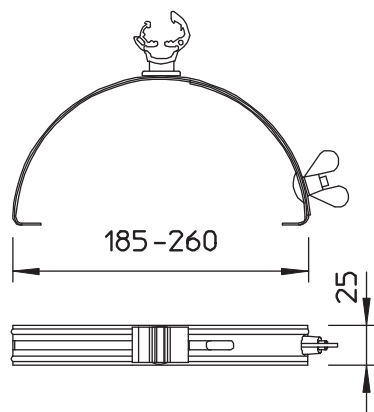

Application	Ridge
Conductor fastening type	With clamp clip
Cable diameter from/to	8,00 - 10,00
Mounting type	Tensionable
Mounting height	20,00 mm
Fit	Rd 8-10 mm
Clamping range D	185,00 - 260,00 mm
Material of the holder	Copper
Material of the support	Rustproof steel (V2A)