


# Technical data sheet

## Roof conductor holder for tiled roofs, angled, Rd 8

Item no. 5215879

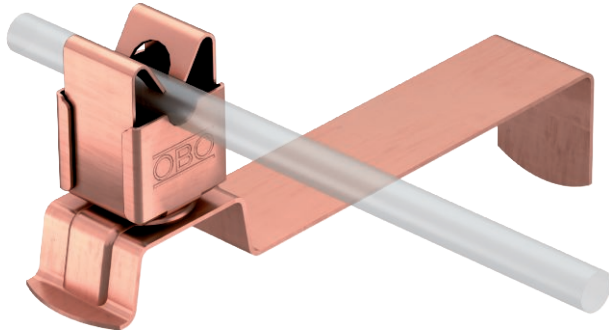


- With flexible bottom section from copper for matching to roof tiles (easy to flex)
- Holder from copper plated stainless steel (V2A)
- Curved bottom section for quick installation

**Cu** Copper

### Master data

|                          |                       |
|--------------------------|-----------------------|
| Item no.                 | 5215879               |
| Type                     | 157 FX-CU             |
| Description 1            | Roof conductor holder |
| Description 2            | with flexible base    |
| Material                 | Copper                |
| Material symbol          | Cu                    |
| Smallest sales unit (VG) | 10 Piece              |
| Weight                   | 7,50 kg/100 pc.       |

### Technical data

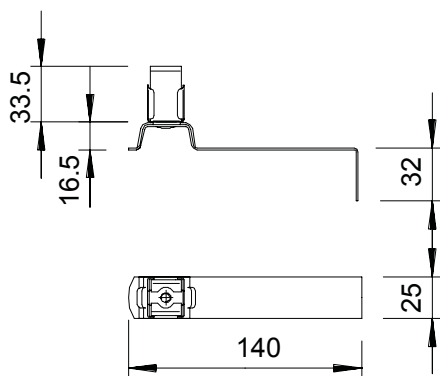

|                          |                       |
|--------------------------|-----------------------|
| Length                   | 140,00 mm             |
| Application              | Roof surface          |
| Conductor fastening type | With clip             |
| Cable diameter from/to   | 8                     |
| Mounting type            | For suspension        |
| Mounting height          | 26,50 mm              |
| Fit                      | Rd 8 mm               |
| Material of the holder   | Rustproof steel (V2A) |
| Material of the support  | Aluminium             |