


Technical data sheet

Equipotential busbar for flexible wall mounting with separation point Item no. 5015874

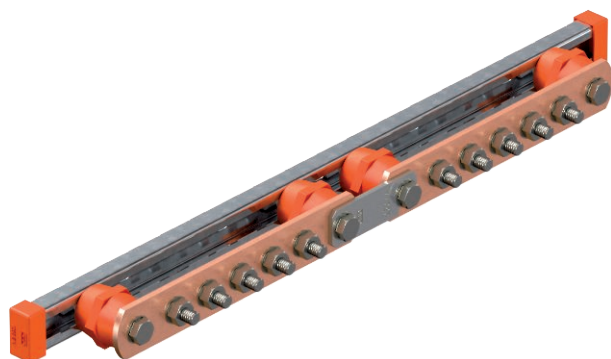

Cu Copper


Main equipotential busbar for equipotential bonding to VDE 0100 Part 410/-540 and lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)

- With separation point (Disconnect – DC)
- For flexible wall mounting
- Complete with profile rail (FT) and screws
- Quick, simple mounting of the connection cable using lock bolts M10
- With lock washer (DIN 137) for bolt locking against loosening

Master data

Item no.	5015874
Type	1802 DC 5+5 CU
Description 1	Equipotential busbar
Description 2	BigBar/5+5 connections CU
Dimension	5+5 x M10
Material	Copper
Material symbol	Cu
Smallest sales unit (VG)	1 Piece
Weight	251,00 kg/100 pc.

Technical data

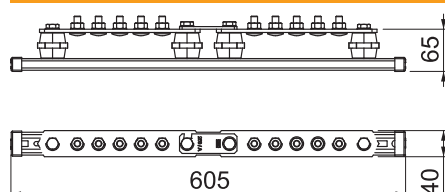

Length	605,00 mm
Width	40,00 mm
Height	85,00 mm
Number of connections	10
Quantity of round conductor connections 8 mm	0
Quantity of round conductor connections 10 mm	0
Quantity of round conductor connections 8-10 mm	0
Quantity of flat conductor connections up to 30 mm	0
Quantity of flat conductor connections up to 40 mm	0
Quantity of cable connections up to 6 mm², rigid	0
Quantity of cable connections up to 16 mm², rigid	0
Quantity of cable connections up to 25 mm², rigid	0
Quantity of cable connections up to 95 mm², rigid	0
Version	Only terminal
Shape	Fixed structure
Lightning current carrying capacity	H/100 kA
Insulator	☒
Material of the terminal	Copper
Material of the contact rail	Copper