


Technical data sheet

Connection terminal for through-wiring

Item no. 5012010

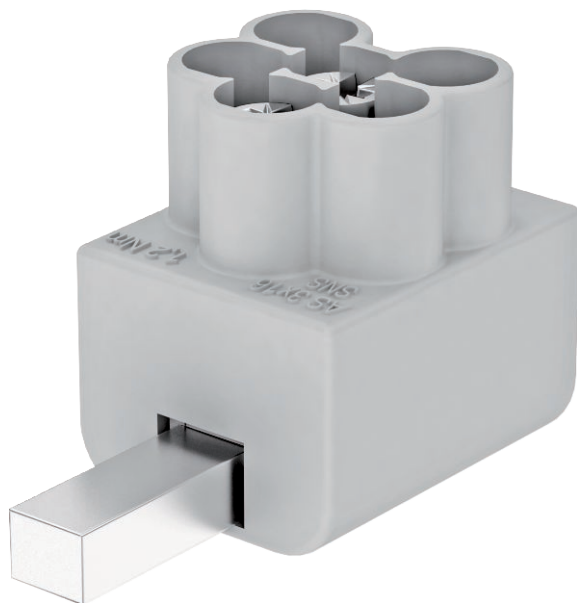


Connection terminal type: AS 3 x 16
Connection cross-section: 3 x 1.5 - 16 mm² rigid/ multiple strands
3 x 1.5 - 10 mm² fine-wire/with wire end sleeve
Stripping length: 16 mm
Rec. tightening torque: 1.2 Nm
Nominal current: 50 A
Width: 17.5 mm (1 PU)

For EMC-optimised V through-wiring to IEC 60364-5-53 (VDE 0100-534).



Dimensions

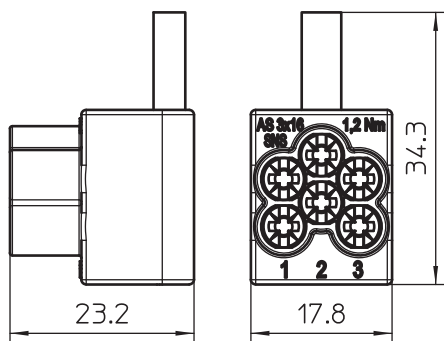

Master data

Item no.	5012010
Type	AS 3x16
Description 1	Connection terminal
Description 2	3x16mm ²
Dimension	16mm ²
Colour	Light grey
RAL number	7035
Smallest sales unit (VG)	5 Piece
Weight	2,47 kg/100 pc.

Technical data

Rated current	50,00 A
Maximum back-up fuse	50,00 A
Pole number	3
Version	3 x 16 mm ²
Division unit TE (17.5 mm)	1
Connection cross-section, flexible	1,50 - 10,00 mm ²
Connection cross-section, rigid	1,50 - 16,00 mm ²

Technical data sheet

Connection terminal for through-wiring

Item no. 5012010



Technical data

Connection cross-section, multi-wire	1,50 - 16,00 mm ²
--------------------------------------	------------------------------