

Technical data sheet

Service outlet GRAF9-2 BA3

Item no. 7405743



AIG Die-cast aluminium


Service outlet with tube body for wet-cleaned floors for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct or trunking systems and system floors for indoor use. Aluminium surface, polished, with a floor covering recess of 3 mm. For an installation depth of 65 mm.

Up to 9 installation devices can be used with a 50 mm central plate.

Master data

Item no.	7405743
Type	GRAF9-2 BA3
Description 1	Service outlet for wet care
Description 2	with floor covering recess
Dimension	325x325x73
Material	Die-cast aluminium
Material symbol	AIG
Smallest sales unit (VG)	1 Piece
Weight	258,00 kg/100 pc.

Technical data

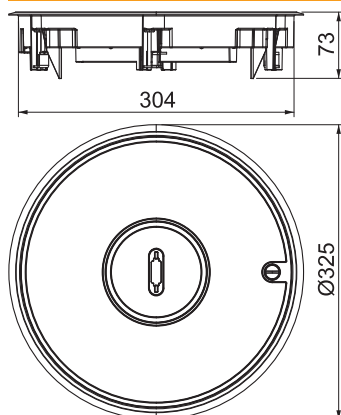

External diameter	325,00 mm
Installation diameter	305
Number of installable devices	12
Number of mounting boxes	3
Cable outlet version	Lowerable tube body
Floor covering thickness	3,00 mm
Floor covering protection frame	☒
Floor care	Wet
Version for	Round
Seal installation option	☒
Floor height	80 mm
Suitable for wet care	☒
Suitable for screed-flush closed underfloor ducts	☒
Suitable for screed-covered underfloor ducts	☒
Suitable for raised floor installation	☒
Suitable for cavity floor installation	☒
Suitable for underfloor ducts	☒
With floor covering recess	☒
Nominal size for device installation units	R9
Suitable for underfloor box	350
Opening mechanism	Turn buckle
Frame version	Carpet protection frame

Technical data sheet

Service outlet GRAF9-2 BA3

Item no. 7405743



Technical data

Schwerlastausführung	☒
Typ des Einbausystems	UT4
Approvals	