Technical data sheet

UTC3 W with 2 protective contact sockets

Item no. 7404610

The ready-for-connection UTC3 universal support has 2 pre-installed 33° protective contact sockets in white of 16 A and one blanking cover for retroinstallation of an installation device of the Modul 45 or Modul 45connect series. Suitable for VL connection cables and device installation units of nominal size 2, 4, R4 and R7.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI

The ready-for-connection UTC3 universal support has 2 pre-installed 33° protective contact sockets in white with 16 A and one blanking cover for retroinstallation of an installation device of the Modul 45 or Modul 45connect series.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI

PA Polyamide

Master data

Item no.	7404610
Type	UTC3 W W2
Description 1	Universal supportConnectWINSTA
Description 2	VDE, double white
Dimension	165x76x45
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	1 Piece
Weight	26,90 kg/100 pc.

Technical data

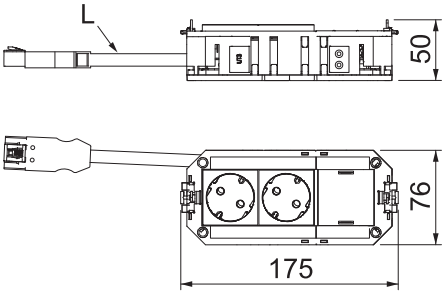

Length	175,00 mm
Width	76,00 mm
Height	60,00 mm
Connection cable, halogen-free	☑
Version for	Double pure white
Cable length	300,00 mm
Line cross-section	2,50 mm²
System length	165,00 mm
Plug-in system	WINSTA® MIDI
Plug connector system, system-specific	☑
Circuit	1
Surge protection	☐