


Technical data sheet

Cavity wall connection socket with cover

Item no. 2003430

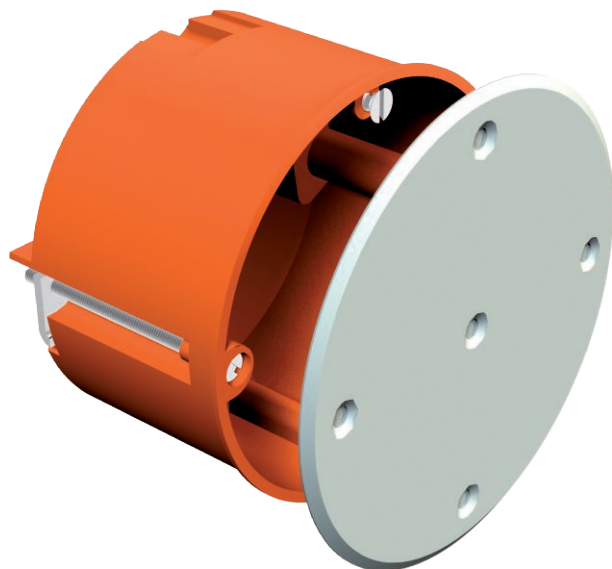

Cavity wall connection box with cover, dimensions to DIN 49073-1, for plate thickness 7-35 mm.
8 break-out openings for NYM cables, data cables and pipes Ø 20 mm, protection rating IP30.



PP Polypropylene




Additional product text 2

According to IEC 60670-1, IEC 60670-22 and DIN 49073-1.

Master data

Item no.	2003430
Type	HV 70 D
Description 1	Connection plug
Description 2	cavity wall
Dimension	Ø74mm, H50mm
Colour	Orange
Material	Polypropylene
Material symbol	PP
Smallest sales unit (VG)	10 Piece
Weight	3,65 kg/100 pc.

Technical data



Height	50,00 mm
Ø	74 Max.
Diameter	74,00 mm
Closable	☐
No. of entries	8
Entries	8
Number of switch boxes	1
Type of entry	break-out openings for NYM cables, data cables and pipes Ø 20 mm
Type of housing penetration	Pre-marking
Version for	Single
Shape	Connection socket/box
Equipment	Without
Cover	Not transparent
Cover fastening	Screwed
Cover screw clearance	67,00 mm
Entry from rear	☒
Milling hole diameter	74,00 mm
Flame-resistant	acc. to VDE 0471/DIN 695 Part 2-1, test temperature 850°C
Shape	Round
For pipe diameter	20 mm
Function maintenance (ETIM)	Without

Technical data sheet

Cavity wall connection socket with cover

Item no. 2003430



Technical data

Floor height	50 mm
Suitable for board thickness	7,00 - 35,00 mm
Halogen-free	☒
Max. conductor cross-section	2,50 mm ²
With screening	☐
With nail strap	☐
With bolts	☒
Mounting type	Cavity wall
Nominal cross section	1,50 - 2,50 mm ²
Rated voltage	400,00 V
Sealable	☐
Impact-resistant	☐
Protection rating	IP30
Support	Without
Airtight	☐