

Technical data sheet

MSL4141 mounting rail, slot 22 mm, FS, perforated

Item number: 1123266



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



- St Steel
- FS Strip galvanized

Master data		
Item number	1123266	
Type	MSL4141P0400FS	
Description 1	Profile rail	
Description 2	perforated, slot 22mm	
Manufacturer	OBO	
Dimension	400x41x41	
Material	Steel	
Surface	Strip galvanized	
Surface standard	DIN EN 10346	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	80.8 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	2,0776 kg CO2e / 1 Piece	


Technical data sheet

MSL4141 mounting rail, slot 22 mm, FS, perforated

Item number: 1123266



Dimensions

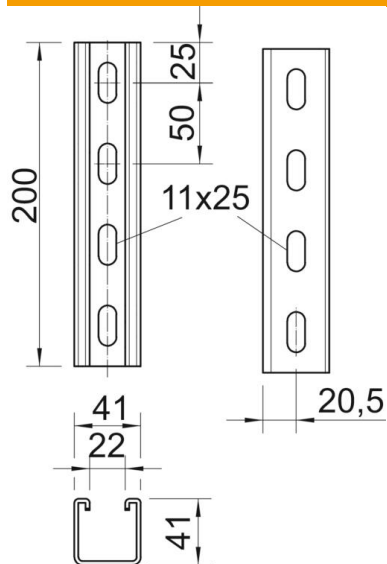

Length	400 mm
Width	41 mm
Height	41 mm
Dimension L	400 mm

Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Maintain electrical functions	yes
Material thickness	2 mm
With perforation	yes
With tothing	yes
Profile shape	C profile
Slot width	22 mm
Static value A	2.45 cm ²
Static value I _y	5.18 cm ⁴
Static value I _z	7.56 cm ⁴
Static value W _y	2.51 cm ³
Static value W _z	2.69 cm ³