

Technical data sheet

CML3518 profile rail, slot 17 mm, A2, perforated

Item number: 1104501



Central C profile rail for cable routing, in conjunction with clamp clips with a hammerhead foot. Can also be used as suspension construction for cable support systems.



A2	Stainless steel
2B	Bright, treated

Master data		
Item number	1104501	
Type	CML3518P2000A2	
Description 1	Profile rail	
Description 2	perforated, slot 17mm	
Manufacturer	OBO	
Dimension	2000x35x18	
Material	Stainless steel 1.4301	
Surface	Bright, treated	
Surface standard		
Smallest sales unit	2	
Unit of quantity	Metre	
Weight	71 kg	
Weight unit	kg/100 m	
CO2 Footprint (GWP) Cradle-to-Gate	3,7679 kg CO2e / 1 Meter	


Technical data sheet

CML3518 profile rail, slot 17 mm, A2, perforated

Item number: 1104501



Dimensions

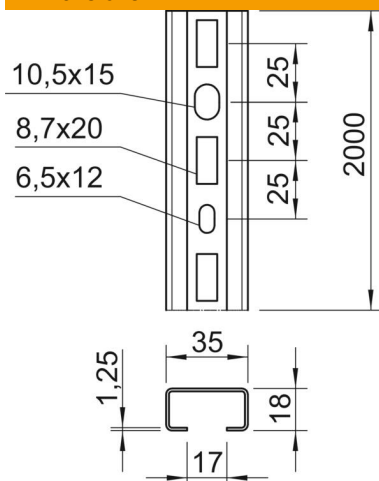

Length	2,000 mm
Width	35 mm
Height	18 mm
Dimension L	2,000 mm

Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	25 mm
Bundle	20 m
Maintain electrical functions	no
Material thickness	1.25 mm
With perforation	yes
With toothing	no
Profile shape	C profile
Rustproof steel, pickled	yes
Slot width	17 mm
Static value A	0.88 cm ²
Static value I _y	0.41 cm ⁴
Static value I _z	0.41 cm ⁴
Static value W _y	1.81 cm ³
Static value W _z	1.03 cm ³