

Technical data sheet

Trunking, type WDK 60170

Item number: 6021867



Trunking cover and base with base perforation.
Four cover clips included.
Lid clamp can be moved along the entire length of the trunking.



PVC Polyvinylchloride

Master data		
Item number	6021867	
Type	WDK60170CW	
Description 1	Wall trunking system	
Description 2	with base perforation	
Manufacturer	OBO	
Dimension	60x170x2000	
Colour	Cream; RAL 9001	
Material	Polyvinylchloride	
Smallest sales unit	8	
Unit of quantity	Metre	
Weight	178 kg	
Weight unit	kg/100 m	
CO2 Footprint (GWP) Cradle-to-Gate	3,7764 kg CO2e / 1 Meter	


Technical data sheet

Trunking, type WDK 60170

Item number: 6021867



Dimensions

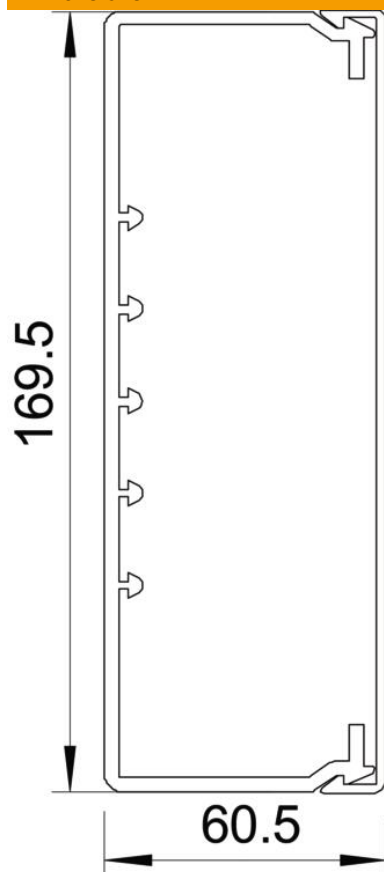

Length	2,000 mm
Width	170 mm
Height	60 mm

Technical data sheet

Trunking, type WDK 60170

Item number: 6021867



Technical data

Number of fixed partitions	0
Number of cables NYM 3 x 1.5 mm ² Ø 10.5 mm (without socket)	46
Number of cables NYM 3 x 2.5 mm ² Ø 11.5 mm (without socket)	39
Number of cables NYM 5 x 1.5 mm ² Ø 12.0 mm (without socket)	35
Number of insertable partitions	2
Version, cable trunking cover	Loose
Fastening type	Base perforation
Halogen-free	no
Cable retaining clip	yes
Duct connector	no
Delivery on a roll	no
Usable cross-section	8089 mm ²
Protection rating	IP30
Protective film	no
Protection rating IK code	IK04
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C