


Technical data sheet

G mesh cable tray Magic® 150

Item no. 6005559

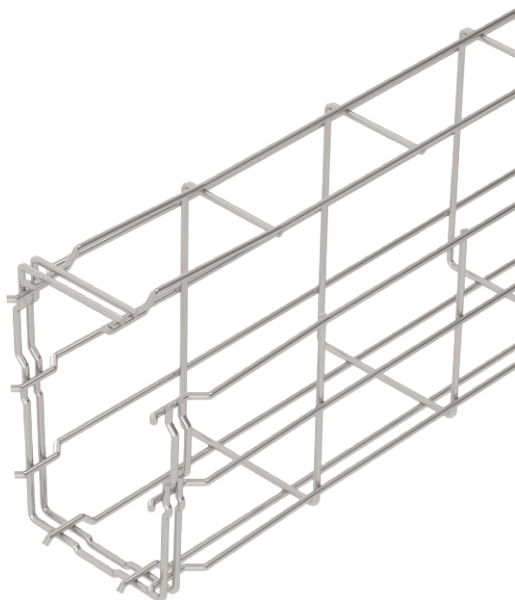

G-shaped mesh cable tray made of spot-welded steel wire with different side heights and widths. Direct wall or ceiling mounting possible. Load capacity details regarding the different mounting methods are available upon request.

Magnetic shield insulation 15 dB.




VA Stainless steel, rustproof 1.4301

2B Bright, reworked

Master data

Item no.	6005559
Type	G-GRM 150 100 A2
Description 1	G mesh cable tray Magic
Dimension	150x100x3000
Material	Stainless steel, material no. 1.4301
Material symbol	A2
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	3 m
Weight	127,07 kg/100 m

Technical data

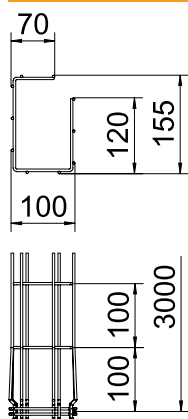

Length	3.000,00 mm
Width	100,00 mm
Height	150,00 mm
Side height	150,00 mm
Dimension A	120,00 mm
Dimension B	100,00 mm
Dimension C	68,00 mm
Dimension H	155,00 mm
Connector version	Integrated connector
Wire diameter	3,90 mm
Suitable for maintaining electrical function	☐
Integrated partition	Without
Usable cross-section	107,00 cm ²
Usable cross-section	10.700,00 mm ²
Profile shape	G-shaped
Rustproof steel, pickled	☒
Wide-span version	☐

Technical data sheet

G mesh cable tray Magic® 150

Item no. 6005559



Technical data

Appr. load:

Support spacing 1.0 m	0,60 kN/m
Support spacing 1.5 m	0,50 kN/m
Support spacing 2.0 m	0,35 kN/m
Support spacing 2.5 m	0,30 kN/m