

Technical data sheet

Earthing clamp, type 952

Item no. 5052114




St	Steel
FT	Hot-dip galvanised

- For pipes 1/2-2" or Ø 11.5-60 mm
- Connection options: conductors 16-70 mm² and/or round conductors to Rd 10 with captive pressure strip from stainless steel
- With 2 hexagonal bolts M6 x 16 and 2 hexagonal bolts M6 x 20 from hot-dip galvanised steel
- Top section of clamp with cast contact point from die-cast zinc, bottom section of clamp from hot-dip galvanised steel

Master data

Item no.	5052114
Type	952 Z 1
Description 1	Earthing clamp
Description 2	for steel strip
Dimension	1"
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	5 Piece
Weight	28,56 kg/100 pc.

Technical data

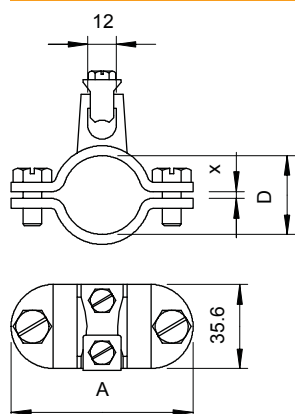

Dimension A	77,00 mm
Dimension D	33,50 mm
Dimension X	3,00 mm
Connection option 1	Cables 16-70 mm ² and round conductors to Rd10
Number of conductors	1
Cross-section of cable to be connected	16,00 - 70,00 mm ²
for pipe diameter	1 inch
Clamping range D	30,50 - 33,50 mm
Clamping range D	1 inch