

Technical data sheet

Earthing clamp, type 952

Art.-Nr. 5052076



- For pipes 1/2" or Ø 11.5-60 mm
- Connection options: conductors 16-70 mm² and/or round conductors to Rd 10 with captive pressure strip from stainless steel
- With 2 hexagonal bolts M6 x 16 and 2 hexagonal bolts M6 x 20 from hot-dip galvanised steel
- Top section of clip with cast contact point from die-cast zinc, bottom section of clip from hot-dip galvanised steel

St

Steel


FT

Hot-dip galvanised

Master data

Item no.	5052076
Type	952 Z 1/2
Description 1	Earthing clamp
Description 2	for steel strip
Dimension	1/2"
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit	5,00 Piece
Weight	24,88 kg/100 pc.

Technical data

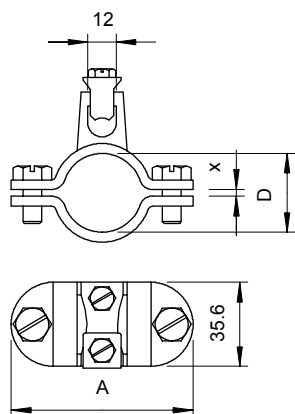

Dimension A	65,00 mm
Dimension D	21,50 mm
Dimension X	3,00 mm
Connection option 1	Cables 16-70 mm ² and round conductors to Rd10
Number of conductors	1,00
Cross-section of cable to be connected	16,00 - 70,00 mm ²
for pipe diameter	1/2 inch
Clamping range D	18,50 - 21,50 mm
Clamping range D	1/2 inch