


Technical data sheet

Clamp clip, single, plastic pressure trough

Item no. 1163396

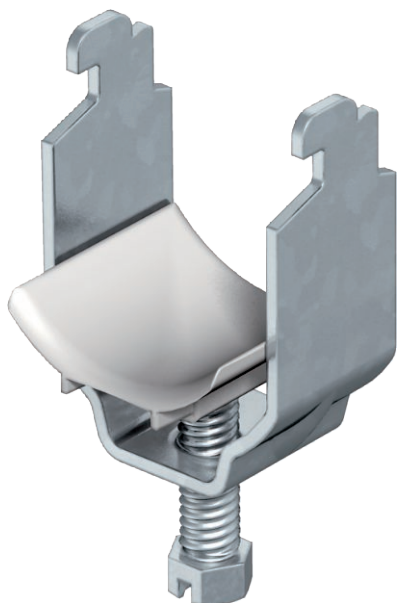

Suitable for all C profile rails with slot width 11–12 mm; at least 6.5 mm clear internal height and at least 18.5 mm clear internal width.

Clip and bolt made of hot-dip galvanised steel.

Polypropylene pressure trough, halogen-free, colour light grey RAL 7035.

Version with welding and/or locknuts for use under difficult circumstances and for shake protection on request.




St	Steel
FT	Hot-dip galvanised

Master data

Item no.	1163396
Type	2056N 40 FT
Description 1	Clamp clip
Dimension	34-40mm
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	100 Piece
Weight	5,97 kg/100 pc.

Technical data

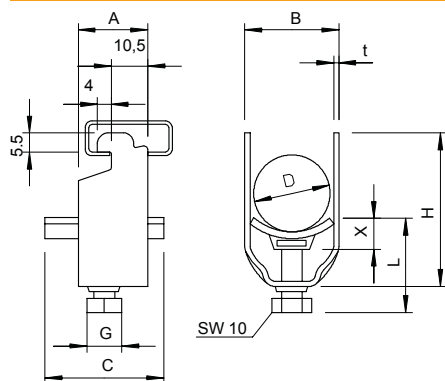

Dimension A	20,00 mm
Dimension B	45,00 mm
Dimension C	34 mm
Dimension G	M8
Dimension H	66,00 mm
Dimension L	37,50 mm
Dimension t	2,00 mm
Dimension x	5,50 mm
Number of cables/pipes	1
Max. tightening torque	5,00 Nm
for 1 cable H	66,00 mm
for 1 cable L	37,50 mm
for 2 cable H	110,00 mm
for 2 cable L	56,50 mm
for 3 cable H	155,00 mm
for 3 cable L	71,50 mm
for pipe diameter	40 mm
for rail with slot width	11,00 - 12,00 mm
Halogen-free	☒

Technical data sheet

Clamp clip, single, plastic pressure trough

Item no. 1163396



Technical data

With plastic trough	☒
With metal trough	☐
Mounting type	Profile rail
Impact-resistant	☐
Clamping range D	34,00 - 40,00 mm
Surface addition	hot galvanised
Material addition	Steel