

Technical data sheet

Hot-dip galvanised steel bend, with thread

Item no. 2046786



90° bend for electrical installation pipes according to EN 61386-1 with threaded ends to DIN EN 60423. With burr-free inner wall.
One connection sleeve is already screwed onto each pipe bend.




St	Steel
FT	Hot-dip galvanised

Master data

Item no.	2046786
Type	SBNM16 FT
Description 1	Conduit threaded bend
Description 2	with threaded coupler
Dimension	M16x1,5
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	15 Piece
Weight	10,40 kg/100 pc.

Technical data

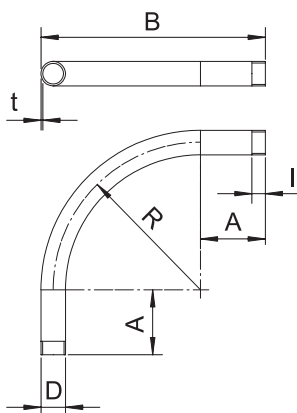

Dimension A	45,00 mm
Dimension B	103,00 mm
Dimension D	16,00 mm
Dimension M	M16
Dimension R	50,00 mm
Dimension t	1,40 mm
Dimension I	13,00 mm
Version	Thread
Thread	M16x1,5
Size	16
For nominal pipe diameter	16,00 mm
Flexible	☐
Halogen-free	☐
With inspection opening and lid	☐
With sleeve	☒
Polished surface	☐
Brushed surface	☐
Angle of the bend	90,00 °
Two-part	☐