

Technical data sheet

Hot-dip galvanised steel bend, with thread

Item no. 2046789



90° bend for electrical installation pipes according to EN 61386-1 with threaded ends to DIN EN 60423. With burr-free inner wall.
One connection sleeve is already screwed onto each pipe bend.




St	Steel
FT	Hot-dip galvanised

Master data

Item no.	2046789
Type	SBNM32 FT
Description 1	Conduit threaded bend
Description 2	with threaded coupler
Dimension	M32x1,5
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	20 Piece
Weight	56,60 kg/100 pc.

Technical data

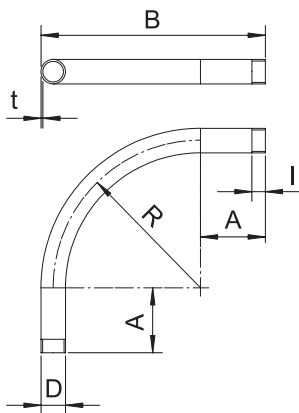

Dimension A	88,00 mm
Dimension B	254,00 mm
Dimension D	32,00 mm
Dimension M	M32
Dimension R	150,00 mm
Dimension t	1,60 mm
Dimension I	18,00 mm
Version	Thread
Thread	M32x1,5
Size	32
For nominal pipe diameter	32,00 mm
Flexible	☐
Halogen-free	☐
With inspection opening and lid	☐
With sleeve	☒
Polished surface	☐
Brushed surface	☐
Angle of the bend	90,00 °
Two-part	☐